


Available Finishes / Materials:
 EG -- Electro-galvanized
 PL -- Plain steel
 Standard Finish: PL, EG

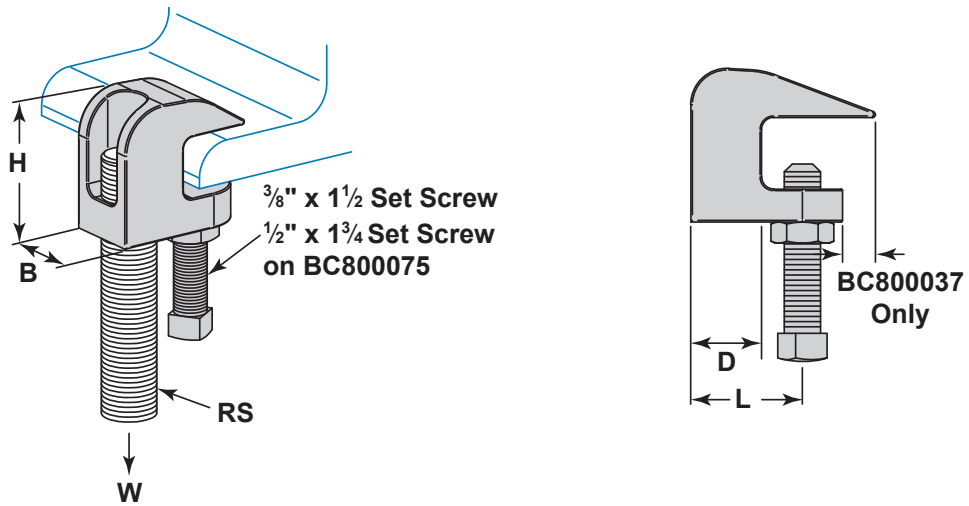

- **Material:** Malleable Iron
- **Finish:** Plain or Electrogalvanized

Maximum flange thickness of 5/16"

Catalog No.	Rod Size (RS)	Max Load W lbs	Max Pipe Size in	B	L	H	D	Wt. Lbs.	Box Qty
				in	in	in	in		
BC800037PL	3/8" - 16	350	4"	13/16"	1-1/4"	1-9/16"	9/16"	0.32	50
BC800037EG	3/8" - 16	350	4"	13/16"	1-1/4"	1-9/16"	9/16"	0.32	50
BC800050PL	1/2" - 13	470	4"	1"	1-3/8"	1-5/8"	9/16"	0.32	50
BC800050EG	1/2" - 13	470	4"	1"	1-3/8"	1-5/8"	9/16"	0.32	50
BC800062PL	5/8" - 11	550	5"	1-1/8"	1-1/2"	1-3/4"	9/16"	0.56	25
BC800062EG	5/8" - 11	550	5"	1-1/8"	1-1/2"	1-3/4"	9/16"	0.56	25
BC800075PL	3/4" - 10	700	6"	1-3/8"	1-13/16"	1-13/16"	5/8"	0.75	20
BC800075EG	3/4" - 10	700	6"	1-3/8"	1-13/16"	1-13/16"	5/8"	0.75	20

Note: Do not over tighten set screw

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

EG – Electro-Galvanized. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use. This is the standard coating for most Jet Stream products. Thickness of applied zinc is between 0.2 mils to 0.5 mils [5.1 µm to 12.7 µm]. Coatings on Jet Stream EG products meet ASTM B633 SC1 Type III.

PL – Plain. No coating on the steel except some oil left on the part from the pickle and oil or fabrication process.

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submitted By:	Address:	
Comment		