


Available Finishes / Materials:

- PG -- Pre-Galvanized zinc
- CP – Copper Zinc Dichromate
- S4 -- 304 stainless steel
- S6 -- 316 stainless steel

Standard Finish: PG

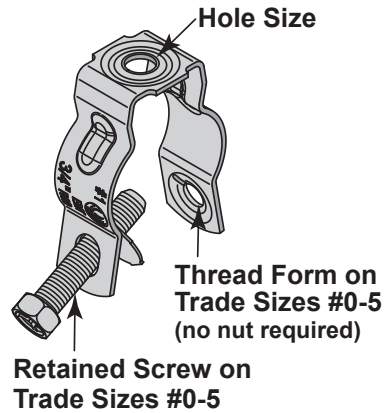

Note: Hanger also available in stainless steel.

Hole size also available with 1/4"-20 thread form on trade sizes 0 thru 5.

Catalog No.	Trade Size	Conduit Size		Hole Size	Box Qty
		EMT	Rigid		
PCH0	0	1/2"	3/8", 1/2"	1/4"	100
PCH037				3/8"	
PCH1	1	3/4"	3/4"	1/4"	100
PCH137				3/8"	
PCH2	2	1"	1"	1/4"	100
PCH237				3/8"	
PCH2.5	2.5	1-1/4"	-	1/4"	100
PCH2.537				3/8"	
PCH3	3	1-1/2"	1-1/4"	1/4"	50
PCH337				3/8"	
PCH4	4	-	1-1/2"	5/16"	50
PCH437				3/8"	
PCH5	5	2"	2"	5/16"	50
PCH537				3/8"	
PCH6 *	6	2-1/2"	2-1/2"	5/16"	25
PCH7 *	7	3"	3"	5/16"	25
PCH8 *	8	3-1/2"	3-1/2"	5/16"	10
PCH9 *	9	4"	4"	5/16"	10

* EG finish and pan head, hex nut hardware.

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

PG – ASTM A653 G-90 Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills. The coils or sheets are slit to size and fabricated by forming, shearing or punching to produce the finished product. During fabrication cut edges are not generally zinc coated; however, the zinc near the uncoated metal becomes a sacrificial anode to protect the bare areas

CP – Copper Zinc Dichromate. A 0.2 mil [5 µm] electro-galvanized zinc plating finished with a copper dichromate coating which meets ASTM B633 SC1 Type II. This copper colored coating improves corrosion resistance over colorless coatings and acts as a non-porous barrier that does not react adversely with copper pipe or tubing.

S4 – 304 Stainless Steel – ASTM A240 (Type 304)

 S6 – 316 Stainless Steel – ASTM A240 (Type 316),
 316 Stainless Steel Nuts – ASTM A276-03

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submitted By:	Address:	
Comment		